



Data Sheet
Glacier Series

GL-RG-12M

Medical Refrigerator

GL-RG-12M

Medical Refrigerator



UL CERTIFIED

UL Certificate	E509170-D1031-1/A0/CO-UL
Meets UL and CAN Standard	UL 61010-1, CAN/CSAC22.2 No. 61010-1(2012-05)

GENERAL SPECIFICATIONS

Cabinet Type	Upright
Capacity	315L / 11.12 cu ft
Internal Size(W*D*H)	580*533*1122mm 22.83*20.98*44.17in
External Size(W*D*H)	650*673*1762mm 25.59*26.49*69.37in
Package Size(W*D*H)	717*732*1785mm 28.22*28.81*70.27in
Net Weight(Kgs)	87/99

PERFORMANCE

Temperature Setting	1 ~8 °C
Ambient Temperature	16 - 32°C
Climate Class	N
Controller	Microprocessor
Display	Digital display

REFRIGERATION

Compressor	1pc
Cooling Method	Air cooling
Defrost Mode	Automatic
Refrigerant	R600a
Insulation Thickness(mm)	R/L:40,U/D:70,B:50

CONSTRUCTION

External Material	Powder coated material
Inner Material	HIPS
Shelves	4+1 (coated steel wired shelf)
Door Lock with Key	Yes
External Lock	Yes
Lighting	LED
Access Port	1pc. Ø 25 mm
Casters	4+ (2 levelers feet)
Data Logging/Interval/Recording Time	USB/Record every 10 minute / 2 years
Door with Heater	Yes
Standard Accessory	RS485,Remote alarm contact, Backup battery

ALARM

Temperature	High/Low temperature High/Low temperature, High ambient temperature, Condenser high temperature
Electrical	Power failure , Low battery
System	Sensor error,Door ajar, Built-in datalogger USB Failure, Remote alarm

ELECTRICAL


Power Supply(V/HZ)	110/60
Power(W)	350

OPTIONS ACCESSORY

System	Printer, RS232
--------	----------------



▶ Performance Data / Cooling Curve

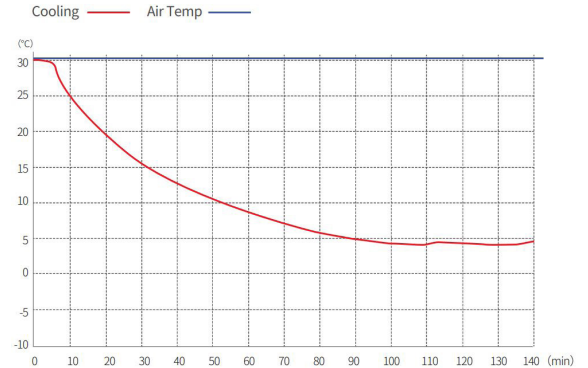

▶ External Dimensions

